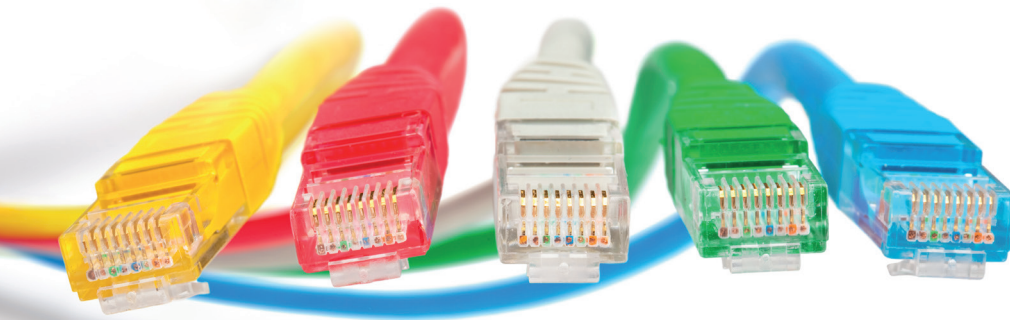


S/FTP CATEGORY 6A**STANDARD**


- SF/UTP 4*2*AWG23/7 - 24/7 - 26/7, Twisted pair 100ohm
- Electrical Performance guaranteed to meet or exceed
- ANSI/TIA-568B Category 5e and ISO/EIC specifications.
- Independently tested and verified Intertek (ETL).
- Ideal for Data Center architectural requirements and and electromagnetic noise environment.
- Stranded cable for maximum flexibility.

CONSTRUCTION

Conductor	Stranded bare copper 23AWG 24AWG 26AWG
Insulation	HDPE
Total number of insulated conductors	8, twisted in 4 pairs
Color code	White-blue/blue, White-orange/Orange, White-green/green, White-Brown/Brown
Individual pair shield	None
Overall shield	Aluminum foil, providing 100% coverage, foil face out + Braided shielded
Drain wire	None
PLUG	30 – 50μ Gold plating
Jacket	CM PVC/LSZH

AVAILABLE COLOR

- Available in different cable color and Plug mold

**AVAILABLE CABLE SIZE****AVAILABLE IN DIFFERENT CABLE SIZE:**

- Standard